

一、SPECIFICATIONS :


- 1、Rated Voltage: 0.66KV
- 2、Insulation Voltage: 2KV
- 3、Rated Frequency: 50HZ 或 60HZ
- 4、Operating Temperature: -15℃ to 60℃
- 5、Flame resistance: UL94-V0
- 6、Certificates: CE



二、FEATURES:

- 1、Small cost
- 2、Split core design ,Easier installation
- 3 Build diode ,no high voltage danger

三、DIMENSIONS(mm):

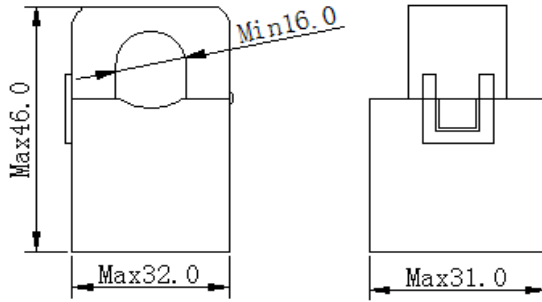

四、DIMENSIONS(mm):

Model	Input (A)	Max current (A)	Output
SCT-T16	0.2-100AAC	120AAC	0-30mArms/0.333VAC
SCT-T10 A			/0-3 VAC

五、CURVE PERFORMANCE

